

CMB, CMBE and CMBE TWIN

Horizontal, multistage centrifugal boosters

50/60 Hz



be
think
innovate

GRUNDFOS 

1. Product introduction	4	Performance curves	19
Product range	4		
Applications	4		
Pumped liquids	4		
Type key	5		
Installation	6		
Selection guide for residential applications	7		
Selection guide for commercial applications	8		
2. CMBE TWIN	9		
Applications	9		
Product Description	9		
Motor	9		
Features	9		
Operating conditions	10		
Electrical data	10		
Approvals	10		
Wetted parts	10		
Dimensional drawings	10		
Control panel	10		
Performance curves	11		
3. CMBE	12		
Applications	12		
Product Description	12		
Motor	12		
Operating conditions	12		
Electrical data	13		
Approvals	13		
Wetted parts	13		
Dimensional drawings	13		
Materials	13		
Control panel	13		
Performance curves	14		
4. CMB-SP PM 2	15		
Applications	15		
Motor	15		
Features	15		
Versions	15		
Operating conditions	15		
Electrical data	15		
Approvals	15		
Self-priming CM Booster sets	16		
Wetted parts	16		
Dimensional drawings	16		
Performance curves	17		
5. CMB PM 2	18		
Applications	18		
Motor	18		
Features	18		
Operating conditions	18		
Electrical data	18		
Approvals	18		
Wetted parts	19		
Dimensional drawings	19		
6. CMB-SP PM 1	20		
Applications	20		
Motor	20		
Features	20		
Versions	20		
Operating conditions	20		
Electrical data	20		
Approvals	20		
Self-priming CM Booster sets	21		
Wetted parts	21		
Dimensional drawings	21		
Performance curves	22		
7. CMB PM 1	23		
Applications	23		
Motor	23		
Features	23		
Operating conditions	23		
Electrical data	23		
Approvals	23		
Wetted parts	24		
Dimensional drawings	24		
Performance curves	25		
8. CMB PT	26		
Applications	26		
Motor	26		
Features	26		
Operating conditions	26		
Electrical data	26		
Approvals	26		
Wetted parts	27		
Dimensional drawings	27		
Performance curves	27		
9. CMB PS	28		
Applications	28		
Motor	28		
Features	28		
Operating conditions	28		
Electrical data	28		
Approvals	28		
Wetted parts	29		
Dimensional drawings	29		
Performance range	29		
10. Product numbers	30		
CMBE TWIN	30		
CMBE	31		
CMB PM 1	33		
CMB PM 2	34		
CMB PT and CMB PS	35		
11. Accessories	36		

12. Grundfos Product Center37

1. Product introduction

The compact Grundfos CM Booster ensures optimal water pressure for domestic and commercial applications, such as clean water and raw-water supply, pressure boosting, irrigation and dewatering. The booster consists of a Grundfos CME or CM pump and a pressure control unit. The pressure control unit allows the pump to start and stop automatically according to demand.

- CMBE Booster offers constant pressure and high comfort thanks to the variable-speed motor, noiseless operation and built-in protection against dry running, overload, overtemperature and more.
- CMBE TWIN Booster has two pumps. Both pumps run, when there is need for a higher flow to maintain a constant pressure.
- CM Booster with a pressure manager protects the pump against dry-running and cycling, and reduces the number of starts and stops. Self priming variants for a suction lift of 0-4 metres or 0-8 metres are also available.
- CM Booster with a diaphragm tank reduces the number of starts in case of low water consumption or leakage.
- CM Booster with pressure switch provides on/off operation.

Product range

Grundfos offers these CM Booster variants:

- CMBE TWIN, two-pump pressure boosting for constant pressure, including cascade control and pump alternation
- CMBE, a variable-speed pump for constant pressure
- CMB-SP PM 2, a self-priming pump with a pressure control unit, type Pressure Manager 2
- CMB PM 2, pump with a pressure control unit, type Pressure Manager 2
- CMB-SP PM 1, a self-priming pump with a pressure control unit, type Pressure Manager 1
- CMB PM 1, a pump with a pressure control unit, type Pressure Manager 1
- CMB PT, a CM pump with a vertical pressure tank
- CMB PS, a CM pump with a pressure switch.



CMBE



TM080265

CMB-SP PM 1 / PM 2,
CMB PM 1 / PM 2

TM080288



CMB PS

TM080289



CMB PT

TM080287

Applications

The boosters are designed to cover a wide range of applications from small domestic installations to small industrial systems. Typical applications:

- Pressure boosting for home and gardening
- water supply for agriculture and irrigation
- transfer and pressure boosting in break tank and rainwater applications
- water supply from shallow wells
- a twin solution for larger applications, such as apartment buildings, hospitals, hotels and small industrial plants.

Pumped liquids

The boosters are suitable for pumping clean, thin, non-aggressive and non-explosive liquids without solid particles or fibres. Examples:

- Drinking or tap water
- rainwater and condensate
- groundwater
- river and lake water
- boiler feed water and district heating water
- chlorinated water
- softened water
- washing and cleaning.

The pumps must not be used for transfer of diesel oil or other oil-containing liquids. Sand and other impurities in the water can cause wear to the pump.

Type key

Note: The type key cannot be used for ordering as not all combinations are possible.

Code	Description
CMBE TWIN: CMBE TWIN Booster with cascade control and pump alternation CMBE: CMBE Booster with integrated frequency converter CMB-SP PM 2: CM Booster, self-priming, with PM 2 CMB-SP PM 1: CM Booster, self-priming, with PM 1 CMB PM 2: CM Booster with PM 2 CMB PM 1: CM Booster with PM 1 CMB PT: CM Booster with pressure switch and tank CMB PS: CM Booster with pressure switch	Type range
At 50 Hz [m ³ /h]	Rated flow rate
- 47	Maximum head [m]
A: Inlet and outlet parts - EN-GJL-200 Pump shaft - EN 1.4301/AISI 304 Impellers/chambers - EN 1.4301/AISI 304 Pressure manager - PP 30GF Pressure tank - EPDM/steel/PP/Butyl 5-way valve - EN 1.4301/AISI 304	Materials in contact with the pumped liquid
I: Sleeve - EN 1.4301/AISI 304 Pump shaft - EN 1.4301/AISI 304 Impellers/chambers - EN 1.4301/AISI 304 Pressure manager - PP 30GF Pressure tank - EPDM/steel/PP/Butyl 5-way valve - EN 1.4301/AISI 304	
A: 1 x 220 V, 60 Hz D: 3 x 220 V, 60 Hz C: 1 x 220-240 V, 50 Hz K: 1 x 200-240 V, 50/60 Hz F: 3 x 230/400 V, 50 Hz U: 1 x 200-240 V, 50/60 Hz* X: 1 x 110-115 V, 60 Hz	Supply voltage [V]
A: Standard motor (IP55) C: High-efficiency motor with frequency converter (IP55)	Motor
A: 1.5 m cable with Australian plug B: 1.5 m cable with US plug C: 1.5 m cable with Schuko plug D: 1.5 m cable without plug E: No cable, no plug H: 1.5 m cable with IRAM (Argentina) plug G: 2 m cable with UK plug J: Fuse box (CMBE TWIN only) O: 1.5 m cable with Thailand plug	Main cable and plug
A: PM 1-15 (1.5 bar) B: PM 1-22 (2.2 bar) C: PM 2 D: Integrated frequency converter G: Integrated frequency converter with inlet pressure switch N: Integrated frequency converter with inlet pressure switch (KIWA-ATA approved) P: Pressure switch	Controller
A: RP 1 B: RP 1 1/4 C: RP 1 1/2 D: RP 2 E: NPT 1 F: NPT 1 1/4 G: NPT 1 1/2 H: NPT 2	Thread

* The new-generation MGE, currently 0.37 to 2.2 kW.

Installation

Mechanical installation

Placing the pump above ground is generally a convenient way of establishing a water or rainwater supply.

Place the pump as close as possible to the water supply to make the inlet pipe as short as possible.

If a hose is used as inlet pipe, it must be non-collapsible. Fit a strainer to the inlet pipe to prevent solids from entering the pump.


The pump must be installed on a plane and solid surface and fixed so that it cannot be displaced during startup and operation. The inlet direction must be horizontal.

The pump must be installed with easy access for inspection, maintenance and service.

The pump must be installed in a well-ventilated location. When installed outdoors, the booster must be provided with a suitable cover. The cover must be sufficiently large to ensure that the motor is not exposed to direct sunlight, rain or snow. Inlet pipe


If the pump is to pump water from a well, borehole or similar, always fit a non-return valve on the inlet pipe of the pump.

The length of the inlet pipe of self-priming pumps must not exceed the length stated in fig. Recommended maximum suction lift or maximum inlet pipe length (Y-axis). The maximum length depends on the geodetic suction lift. As shown in the example below, if the suction lift is 2.5 m, then the length of the inlet pipe must not exceed 25 m.

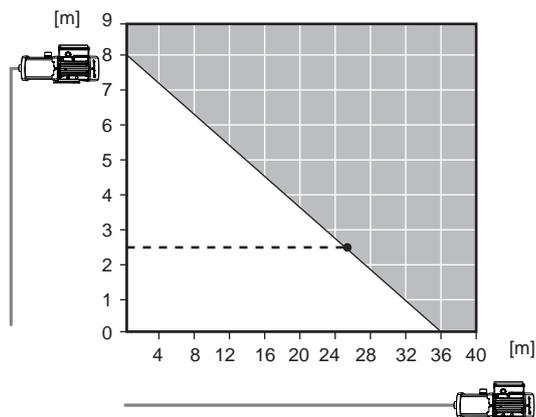

Recommended maximum suction lift or maximum inlet pipe length (Y-axis)

Install the inlet pipe in such a way that bends, airlocks and any unnecessary restrictions to the flow are avoided. See fig. Pipe recommendations.

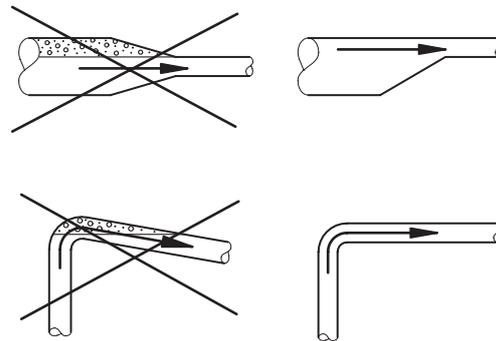

Pipe recommendations

Long inlet pipes affect the performance of the pump. The diameter of the inlet pipe must not be smaller than that of the inlet port. When the inlet pipe is longer than 10 metres or the suction lift is greater than 4 metres, the diameter of the inlet pipe must be larger than that of the inlet port.

The time from when the pump is started until it delivers water depends on the length of the inlet pipe and on the suction lift. Do not allow the pump to run for more than five minutes before it delivers water as the heat generated will damage the pump.

Operating conditions


The maximum time of operation against a closed outlet valve is limited by the liquid temperature which must not exceed +40 °C (104 °F).

The maximum inlet pressure depends on the pump head at the actual duty point. The sum of the inlet pressure and the pump head must not exceed the maximum system pressure.

TM040338

TM059442

Selection guide for residential applications

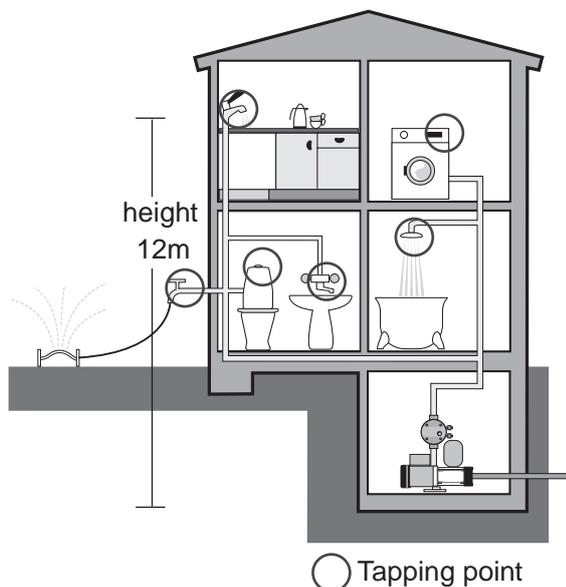

- A: Required comfort level**
- Adjustable constant pressure.
- B: Find the right booster**
- How many taps? 6.
 - How many floors? 3.
- Result: CMBE 3-62**

Sizing and selection

Booster sizing and selection

Variable speed control

Number of floors	Number of taps			
	1-5	6-10	11-20	21-50
4	CMBE 3-62	CMBE 3-62	CMBE 3-62	CMBE 3-93
3	CMBE 1-44	CMBE 3-62	CMBE 3-62	CMBE 3-62
2	CMBE 1-44	CMBE 1-44	CMBE 3-62	CMBE 3-62
1	CMBE 1-44	CMBE 1-44	CMBE 3-62	CMBE 3-62

Conventional pump control

Number of floors	Number of taps			
	1-5	6-10	11-20	21-50
4	CMB 1-54	CMB 3-46	CMB 3-46	CMB 5-47
3	CMB 1-45	CMB 3-37	CMB 3-46	CMB 5-47
2	CMB 1-45	CMB 3-37	CMB 3-46	CMB 5-37
1	CMB 1-36	CMB 3-27	CMB 3-37	CMB 5-37

Preconditions:

- A tap pressure of 3 bar is considered. To achieve a pressure of 4 bar, add two floors.
- If the inlet is flooded: In suction operation (CM Booster SP) add more floors to compensate for head loss.
- 0.5 l/s per tap average usage pattern is taken into account. Grundfos cannot be held responsible for wrong sizing based on this guide.

Selection guide for commercial applications

The following instructions primarily target commercial applications.

The CMBE TWIN Booster is the recommended product for commercial applications in large buildings, small industrial plants and businesses, agriculture and irrigation. See examples and calculations below.

Note: Local legislation must always be taken into account.

Flow rate

The total consumption and the required maximum flow rate depend on the application in question. The required maximum flow rate can be calculated by means of the table below which is based on statistical data.

Consumer	Unit [n]	Q_{year}	Consumption period [d]	Q_{day}	fd *	$Q \text{ (m)}_{\text{day}}$	ft **	Max. flow rate
		m^3/year	days/year	m^3/day		m^3/day		m^3/h
Residence building	Residents (2.5 persons)	183	365	0.5	1.3	0.65	1.7	0.046
Office building	Employee	25	250	0.1	1.2	0.12	3.6	0.018
Shopping centre	Employee	25	300	0.08	1.2	0.1	4.3	0.018
Supermarket	Employee	80	300	0.27	1.5	0.4	3.0	0.05
Hotel	Bed	180	365	0.5	1.5	0.75	4.0	0.125
Hospital	Bed	300	365	0.8	1.2	1.0	3.0	0.12
School	Pupil	8	200	0.04	1.3	0.065	2.5	0.007

* fd: Maximum consumption factor per day.

** ft: Maximum consumption factor per hour.

Example: Hotel with 540 beds

Number of beds:	n.
Total annual consumption:	$Q_{\text{year}} \times n$.
Consumption period:	d.
Average consumption per day:	$(Q_{\text{year}} \times n)/d$.
Maximum consumption per day:	$Q \text{ (m)}_{\text{day}} = \text{fd} \times Q_{\text{day}}$.
Required maximum flow rate per hour:	$Q_{\text{max}} = \text{maximum flow rate/hour} \times \text{number of beds}$.

Calculation

n	= 540 beds.
$Q_{\text{year}} \times n$	= $180 \times 540 = 97,200 \text{ m}^3/\text{year}$.
d	= 365 days/year.
$(Q_{\text{year}} \times n)/d$	= $97,200/365 = 266.3 \text{ m}^3/\text{day}$.
$Q \text{ (m)}_{\text{day}}$	= $\text{fd} \times Q_{\text{day}} = 1.5 \times 266.3 = 399.4 \text{ m}^3/\text{day}$.
Q_{max}	= $\text{maximum flow rate/hour} \times \text{number of beds} = 0.125 \times 540 = 67.5 \text{ m}^3/\text{h}$.

2. CMBE TWIN

CMBE TWIN Booster



GR-1031344

CMBE TWIN Booster

Applications

The compact Grundfos CMBE TWIN Booster is suitable for clean water supply and pressure boosting in domestic and commercial applications. The CMBE TWIN Booster keeps a constant pressure in the pipe system and is mainly used in places such as:


- two-family houses
- cluster homes
- blocks of flats
- schools
- small hotels
- small office buildings
- small industrial plants and businesses
- hospitals
- agriculture and irrigation.

Product Description

The CMBE TWIN Booster system consists of two CMBE Boosters connected in parallel and mounted on a common base plate.

Accessories:

- vibration dampers (PN 99217259)
- twin manifold set with ball valve and unions and 1 1/2" outlet connection. (PN 99229422 for 1" inlet connection) (PN 99229453 for 1 1/4" inlet connection)

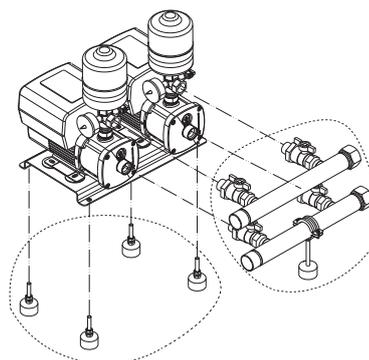

TM068740

Accessories

Motor

No external motor protection is required. The MGE motor incorporates thermal protection against slow overloading and blocking (TP 211 according to IEC 34.11).

Features

- Constant pressure via integrated speed control
- cascade control and pump alternation
- dry-running protection
- compact
- robust, stainless steel design
- easy installation
- low energy consumption
- noise level < 55 dB(A) and even lower at controlled speed.

Constant pressure

The integrated speed controller keeps a constant pressure in the pipe system. A pressure sensor monitors changes in the water consumption and signals to the speed controller to adjust the motor speed up or down.

Cascade control

Cascade control ensures that the performance of the booster system is automatically adapted to the consumption by switching pumps on or off and by changing the speed of the pumps in operation. The system runs as energy-efficiently as possible with a constant pressure and only the number of pumps required.

Pump alternation

Pump alternation ensures that the operating hours are distributed evenly on the pumps over time. CMBE TWIN Booster automatically alternates the pumps and will start the available pump with the lowest number of running hours since the last time the power was switched off.

Dry-running protection

Dry-running protection is very important as dry running may damage the bearings and shaft seals. The inlet pressure of the system or the water level in a possible tank on the inlet side is monitored. Lack of inlet pressure

or water shortage is indicated by the motor speed. When dry running is detected, the CMBE Booster will stop and go into alarm mode. The pump will attempt 5 restarts at 10 second intervals. If there is no water shortage, it will attempt 8 restarts at 5 minute intervals. If this is not successful, the cycle will be repeated after 24 hours.

Easy installation

The booster is easy to install. When the booster has been connected to the pipes, it is all a matter of plugging the plug into a socket, and the system is operational.

Operating conditions

System pressure	Max. 10 bar.
Suction lift	Max. 1 m, including suction-pipe pressure loss at a liquid temperature of +20 °C.
Liquid temperature	0-60 °C.
Ambient temperature	Max. +55 °C. Min. -20 °C.
Relative humidity	Max. 95 %.
Enclosure class	IP55.
Insulation class	F.
Sound pressure level	The sound pressure level of the pump is below 55 dB(A).
Supply voltage	1 x 200-240 V, 50/60 Hz.
Start/stop frequency	Max. 100 per hour.
Cut-in pressure	0.5 bar below setpoint.

Electrical data

Pump type	Voltage [V]	I _{max} [A]	P1 [W]	Plug type
CMBE TWIN 3-62	1 x 200-240	6.7 - 5.6	1210	Schuko or fuse box
CMBE TWIN 3-93	1 x 200-240	9.1 - 7.6	1720	
CMBE TWIN 5-62	1 x 200-240	9.1 - 7.6	1720	

Approvals

The product is built according to European drinking water approvals.

For further information regarding product approvals, visit Grundfos Product Center.


Wetted parts

The table below specifies the parts of the pump that are in contact with the pumped liquid.

Designation	Material	Technical description
Pump sleeve	Stainless steel	EN 1.4301 AISI 304
Impeller	Stainless steel	EN 1.4301 AISI 304
Diffuser	Technopolymer	PP 20 % Talc
Ejector	Technopolymer	PPE/PS 20 % GF
Nozzle	Stainless steel	EN 1.4301 AISI 304

Designation	Material	Technical description
Shaft	Stainless steel	EN 1.4301 AISI 304
Shaft seal	Carbon with resin/ceramic	CVBP
Filling plug	Technopolymer	PES 30 % GF
Drain plug	Technopolymer	PES 30 % GF

Dimensional drawings

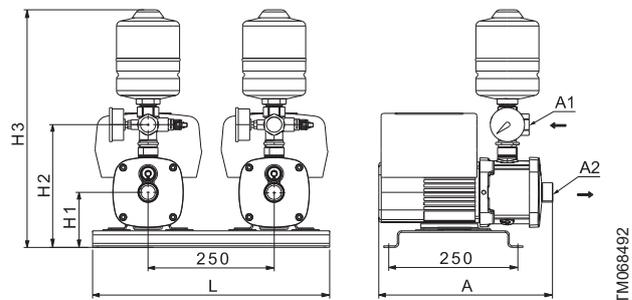


Pump type	H3	H2	H1	L	A	A1 [inch]	A2 [inch]
CMBE TWIN 3-62	485	235	110	475	344	1	1
CMBE TWIN 3-93	495	250	125	475	404	1	1
CMBE TWIN 5-62	495	250	125	475	350	1	1 1/4

Control panel

The control panel on the pump terminal box makes it possible to change the setpoint settings manually.

The operating condition of the pump is indicated by the Grundfos Eye on the control panel. See fig. Control panel, pos. A.

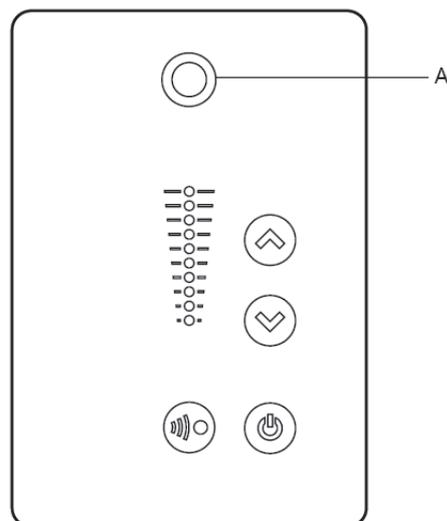


Control panel

Set the desired setpoint by pressing ☉ or ☉. The light fields on the control panel will indicate the setpoint set. Continuously pressing ☉ will stop the pump.

Pressing ☉ will enable infrared communication with the Grundfos GO Remote and with other products of same type using infrared.

Performance curves

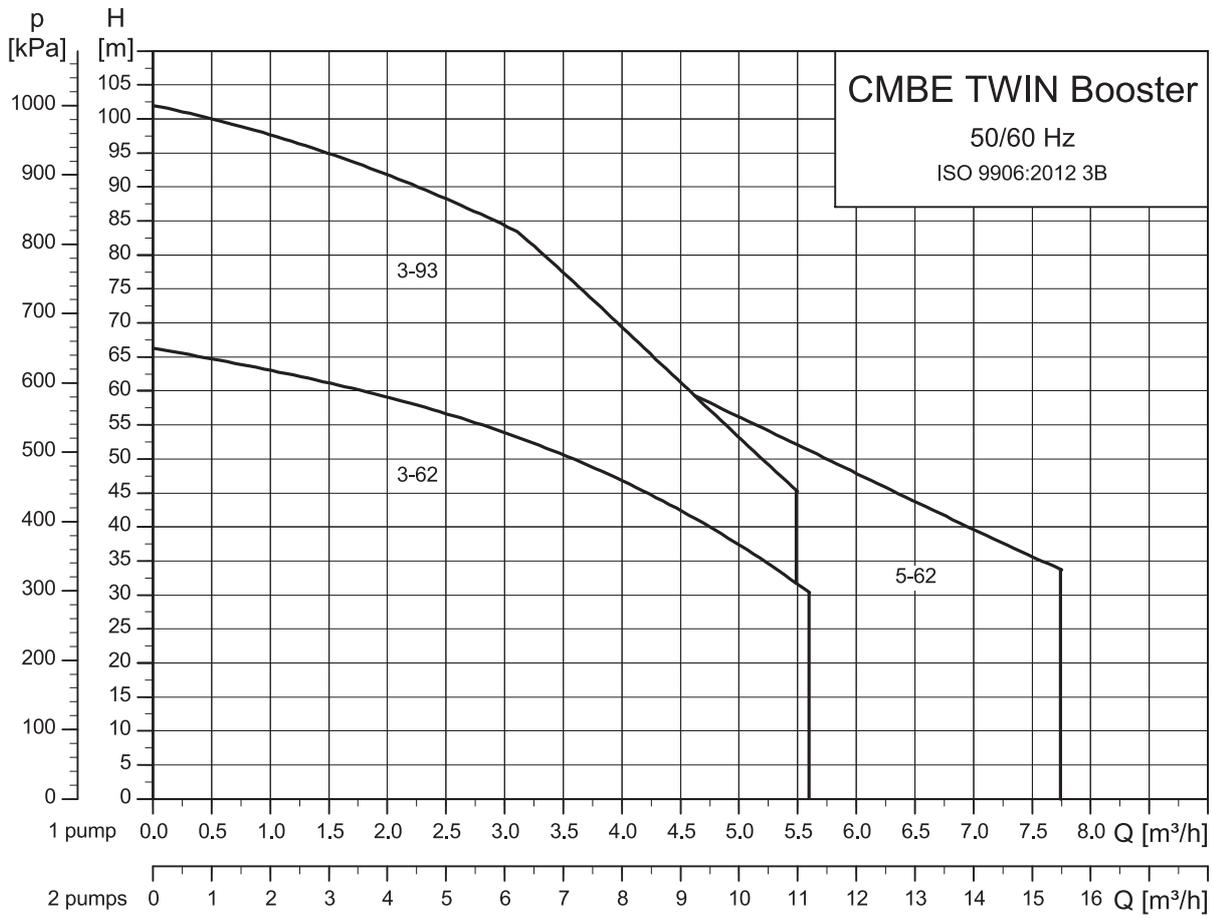

TM068495

3. CMBE

CMBE Booster



GR-1031643

CMBE Booster

Applications

The compact Grundfos CMBE Booster is suitable for clean water supply and pressure boosting in domestic and light commercial applications.

The CMBE Booster keeps a constant pressure in the pipe system and is mainly used in places such as:

Application	CMBE 1	CMBE 3	CMBE 5	CMBE 10
Single-family houses	●	●	○	○
Two-family houses	○	●	●	●
Cluster homes		●	●	●
Blocks of flats		●	●	●
Schools		●	●	●
Small hotels/guest houses		●	●	●
Small office buildings		●	●	●
Agriculture		○	●	●
Irrigation		○	●	●

- Recommended
- Applicable.

Product Description

The CMBE Booster consists of these components:

- CMBE pump with integrated frequency converter
- 5-way fitting with non-return valve
- diaphragm tank
- pressure gauge
- pressure sensor
- inlet pressure switch (optional).

Motor

No external motor protection is required. The MGE motor incorporates thermal protection against slow overloading and blocking (TP 211 according to IEC 34.11).

Features

- Constant pressure via integrated speed control
- dry-running protection
- compact
- robust, stainless steel design
- easy installation
- low energy consumption
- noise level below 55 dBA and even lower at controlled speed.

Constant pressure

The integrated speed controller keeps a constant pressure in the pipe system. A pressure sensor monitors changes in the water consumption and signals to the speed controller to adjust the motor speed up or down.

Dry-running protection

Dry-running protection is very important as dry running may damage the bearings and shaft seals. The inlet pressure of the system or the water level in a possible tank on the inlet side is monitored. Lack of inlet pressure or water shortage is indicated by the motor speed. When dry running is detected, the CMBE Booster will stop and go into alarm mode. The pump will attempt 5 restarts at 10 second intervals. If there is no water shortage, it will attempt 8 restarts at 5 minute intervals. If this is not successful, the cycle will be repeated after 24 hours.

Easy installation

The booster is easy to install. When the booster has been connected to the pipes, it is all a matter of plugging the plug into a socket, and the system is operational.

Operating conditions

System pressure	Max. 10 bar.
Suction lift	Max. 1 m, including suction-pipe pressure loss at a liquid temperature of +20 °C.
Liquid temperature	0-60 °C.
Ambient temperature	Max. +55 °C. Min. -20 °C.
Relative humidity	Max. 95 %.
Enclosure class	IP55.
Insulation class	F.
Sound pressure level	The sound pressure level of the pump is below 55 dB(A).
Supply voltage	1 x 200-240 V, 50/60 Hz.
Start/stop frequency	Max. 100 per hour.
Cut-in pressure	0.5 bar below setpoint.

Electrical data

1-phase

Pump type	Voltage [V]	I _{max} [A]	P1 [W]	Plug type
CMBE 1-44	1 x 200-240	3.45 - 2.9	615	Schuko, US, AU, UK, IRAM, Type O or without plug
CMBE 1-75	1 x 200-240	6.7 - 5.6	998	
CMBE 3-30	1 x 200-240	6.7 - 5.6	688	
CMBE 3-51	1 x 200	8	1210	
	1 x 115	8	800	
CMBE 3-62	1 x 200-240	6.7 - 5.6	1210	
CMBE 3-93	1 x 200-240	9.1 - 7.6	1720	
CMBE 5-62	1 x 200-240	9.1 - 7.6	1720	
CMBE 10-54	1 x 200-240	9.1 - 7.6	1710	

3-phase

Pump type	Voltage [V]	I _{max} [A]	P1	Plug type
CMBE 3-51	3 x 220	4.1	1210	No plug

Approvals

The product is built according to European drinking water approvals.


For further information regarding product approvals, visit Grundfos Product Center.

Wetted parts

The table below specifies the parts of the pump that are in contact with the pumped liquid.

Designation	Material	Technical description
Pump sleeve	Stainless steel	EN 1.4301 AISI 304
Impeller	Stainless steel	EN 1.4301 AISI 304
Diffuser	Technopolymer	PP 20 % Talc
Ejector	Technopolymer	PPE/PS 20 % GF
Nozzle	Stainless steel	EN 1.4301 AISI 304
Shaft	Stainless steel	EN 1.4301 AISI 304
Shaft seal	Carbon with resin/ceramic	CVBP
Filling plug	Technopolymer	PES 30 % GF
Drain plug	Technopolymer	PES 30 % GF

Dimensional drawings

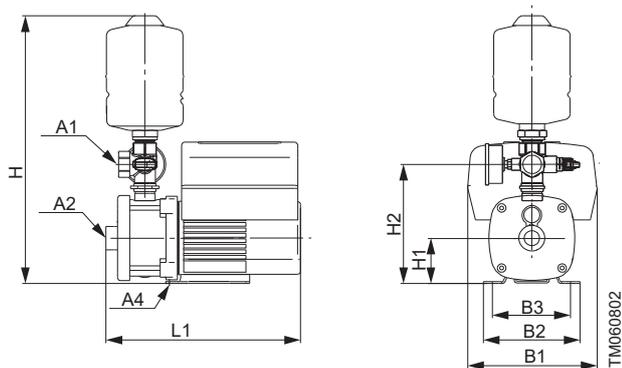

Pump type	H3	H2	H1	L1	B1	A1 [inch]	A2 [inch]
CMBE 1-44	440	200	75	326	217	1	1
CMBE 1-75	440	200	75	362	217	1	1
CMBE 3-30	440	200	75	326	217	1	1
CMBE 3-51	440	200	75	326	217	1	1
CMBE 3-62	440	200	75	344	217	1	1
CMBE 3-93	455	215	90	404	217	1	1
CMBE 5-62	455	215	90	350	217	1	1 1/4
CMBE 10-54	509	253	92	380	212	1 1/2	1 1/2


Materials

Designation	Material
Terminal box	Composite PC/ASA and silumin (Alu)
Stator housing	Silumin (Alu)
Fan cover	Composite PBT/PC
Pump housing	Stainless steel, EN 1.4301/AISI 304
Shaft and impeller	Stainless steel, EN 1.4301/AISI 304
Flange	Cast iron

Control panel

The control panel on the E-pump terminal box makes it possible to change the setpoint settings manually.

The operating condition of the pump is indicated by the Grundfos Eye on the control panel. See fig. Control panel, pos. A.

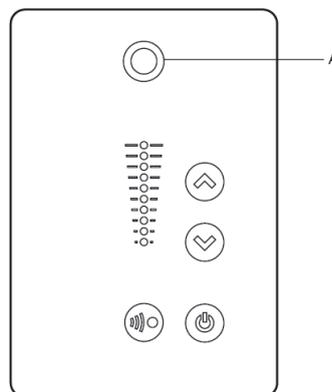


Control panel

Set the desired setpoint by pressing or . The light fields on the control panel will indicate the setpoint set. Continuously pressing will stop the pump.

Pressing will enable infrared communication with the Grundfos GO Remote and with other products of same type using infrared.

TM055993

Performance curves

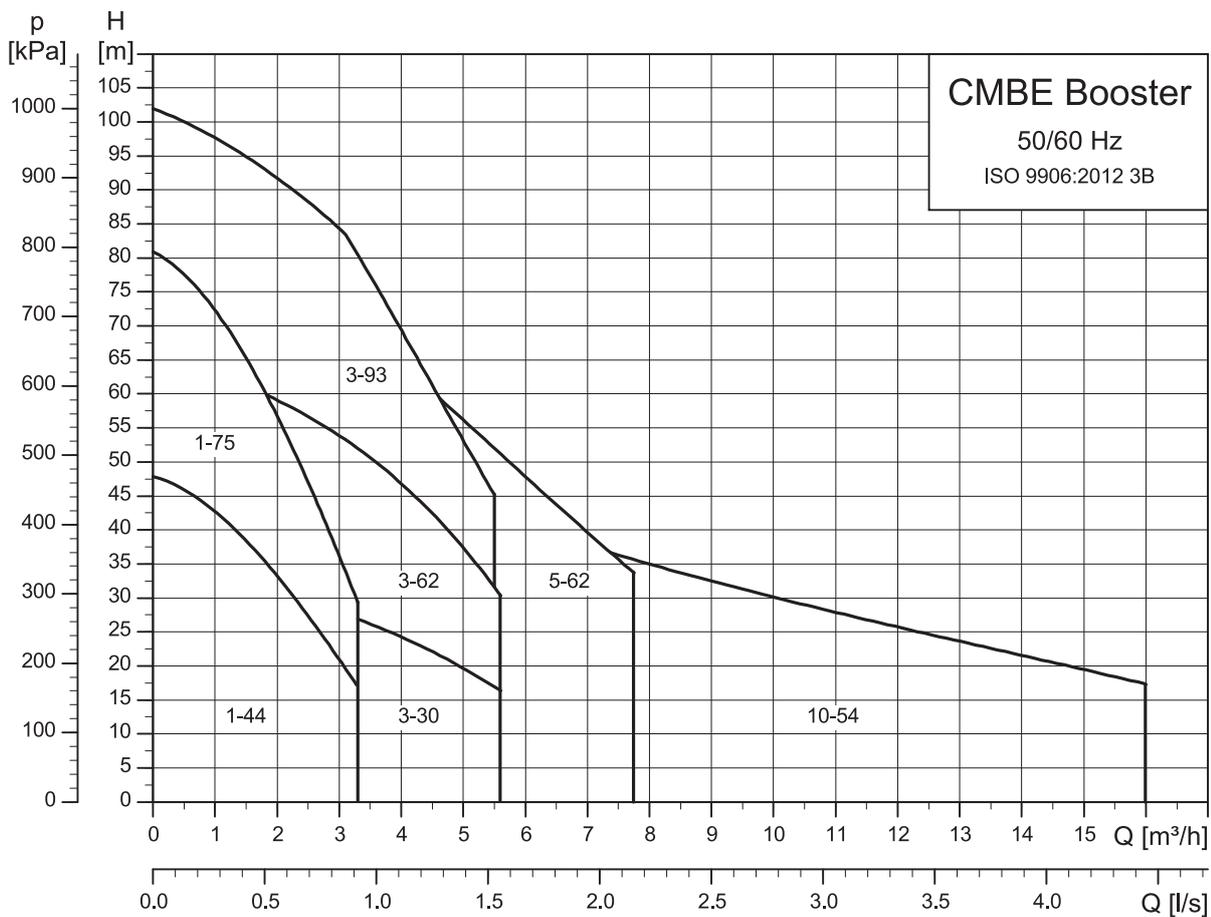

TM061039

4. CMB-SP PM 2

CM Booster Self-Priming Pressure Manager 2



GR-1015357

CM Booster PM 2

The self-priming Grundfos CM Booster supplied with a PM 2 pressure manager is a compact booster for water supply in domestic applications. The pressure manager allows the pump to start and stop automatically according to demand and protects the pump from dry running.

The CM Booster is very easy to install. When the booster has been connected to the pipes, it is all a matter of plugging the plug into a socket, and the system is operational.

Applications

Grundfos self-priming CM PM 1 Booster is mainly used for domestic and light commercial water supply or booster systems.

Application	CMB3	CMB5
Single-family houses	●	○
Two-family houses	●	●
Cluster homes	●	●
Blocks of flats	●	●
Schools	●	●
Small hotels/guest houses	●	●
Small office buildings	●	●

● Recommended

○ Applicable.

Motor

CM Booster pumps have built-in current- and temperature-dependent motor protection in accordance with IEC 60034-11 and require no further motor protection.

Features

- Compact
- self-priming within five minutes
- easy installation
- dry-running protection
- anti cycling (leakage detection).

Versions

CMB-SP is available in two versions:

- Standard version with pressure manager factory mounted on the pump. This version allows a suction lift of maximum 4 m.
- Kit version, called CMB-SP SET, without pressure manager mounted on the pump. This version allows a suction lift of maximum 8 m if there is a pipe between the pump and the pressure manager of at least 0.7 m. The kit version is capable of suction lift between 0 and 8 m depending on the pipe length between pump and pressure manager.

Operating conditions

System pressure	Max. 10 bar.
Suction lift (H2)	0 < H2 ≤ 4 m (standard version). 4 < H2 ≤ 8 m (Set version). Including suction-pipe pressure loss at a liquid temperature of +20 °C.
Liquid temperature	0-60 °C.
Ambient temperature	Max. +55 °C. Min. -20 °C.
Relative humidity	Max. 95 %.
Enclosure class	IP55.
Insulation class	F.
Sound pressure level	The sound pressure level of the pump is below 55 dB(A). Note: During priming the sound level may be higher.
Supply voltage	1 x 220-240 V, 50 Hz.
Start/stop frequency	Max. 60 per hour.
Cut-in pressure	1.5 - 5 bar (adjustable).

Electrical data

Pump type	Voltage [V]	I _{max} [A]	P1 [W]	Plug type
CMB-SP 3-28	1 x 220-240	3.1 - 2.8	490	Schuko, AU, UK or without plug
CMB-SP 3-37	1 x 220-240	3.1 - 2.8	587	
CMB-SP 3-47	1 x 220-240	3.1 - 2.8	753	
CMB-SP 3-56	1 x 220-240	4.4 - 4.0	867	
CMB-SP 5-28	1 x 220-240	3.1 - 2.8	684	
CMB-SP 5-47	1 x 220-240	5.4 - 5.0	1170	


Approvals

The product is built according to European drinking water approvals.

For further information regarding product approvals, visit Grundfos Product Center.

Self-priming CM Booster sets

Note: The following applies only to self-priming CM Boosters delivered as sets.

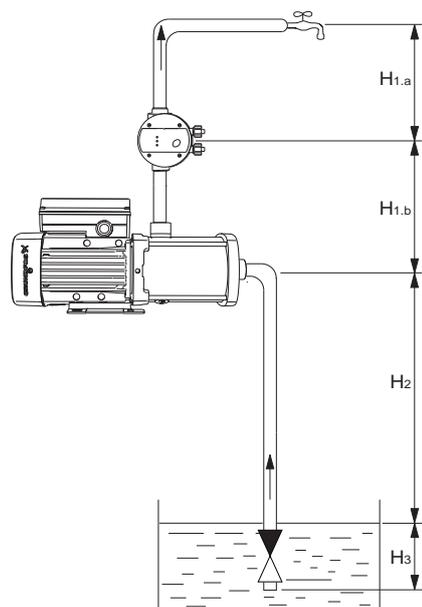

Self-priming CM Booster

The length $H_{1,b}$ of the outlet pipe must be minimum 0.2 metres. See fig. Self-priming CM Booster. By increasing $H_{1,b}$, a suction lift up to 8 metres can be achieved. Use the table below to determine the necessary outlet pipe length for your desired suction lift.

Outlet pipe length $H_{1,b}$ [m]	Resulting suction lift H_2 [m]
≥ 0.35	5
≥ 0.5	6
≥ 0.6	7
≥ 0.7	8

Install the pressure manager on the outlet side of the pump. It incorporates a non-return valve.

We recommend to install the unit so that the height between the unit and the highest tapping point, $H_{1,a}$, does not exceed the values in the table below. See fig. Self-priming CM Booster.


Pressure manager	Start pressure [bar]	Maximum height $H_{1,a}$ [m]
PM 1-15	1.5	10
PM 1-22	2.2	17
	1.5	11
	2	16
	2.5	21
PM 2	3	26
	3.5	31
	4	36
	4.5	41
	5	46

Wetted parts

The table below specifies the parts of the pump that are in contact with the pumped liquid.


Designation	Material	Technical description
Pump sleeve	Stainless steel	EN 1.4301 AISI 304
Impeller	Stainless steel	EN 1.4301 AISI 304
Diffuser	Technopolymer	PP 20 % Talc
Ejector	Technopolymer	PPE/PS 20 % GF
Nozzle	Stainless steel	EN 1.4301 AISI 304
Shaft	Stainless steel	EN 1.4301 AISI 304
Shaft seal	Carbon with resin/ceramic	CVBP
Filling plug	Technopolymer	PES 30 % GF
Drain plug	Technopolymer	PES 30 % GF

Dimensional drawings

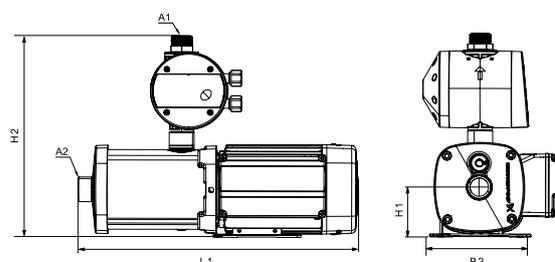

Pump	A1 [inch]	A2 [inch]	L1	B2	H1	H2
CMB-SP 3-28	1	1	377	158	75	317
CMB-SP 3-37	1	1	377	158	75	317
CMB-SP 3-47	1	1	413	158	75	317
CMB-SP 3-56	1	1	453	158	75	317
CMB-SP 5-28	1	1	377	158	75	317
CMB-SP 5-47	1	1	453	158	75	317

Performance curves

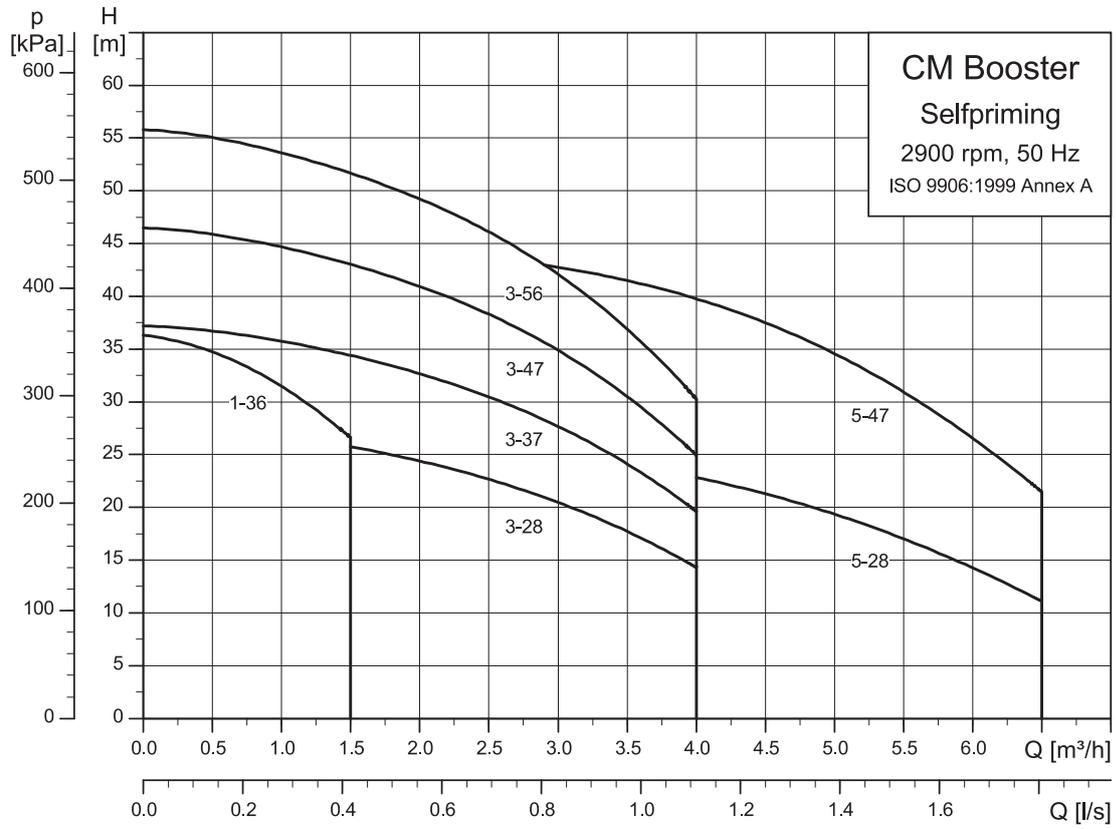

TM061042

*1-36 is only available for CMB-SP PM 1.

5. CMB PM 2

CM Booster Pressure Manager 2



GR-1015968

CM Booster PM 2

The compact Grundfos CM Booster with a PM 2 pressure manager is suitable for water supply in domestic applications. The CM pump is available with a stainless-steel and cast iron pump housing. The pressure manager allows the pump to start and stop automatically according to demand and protects the pump from dry running.

The CM Booster is very easy to install. When the booster has been connected to the pipes, it is all a matter of plugging the plug into a socket, and the system is operational.

Applications

Grundfos CM PM 2 Booster is mainly used for domestic and light commercial water supply or booster systems.

Application	CMB 5
Single-family houses	○
Two-family houses	●
Cluster homes	●
Blocks of flats	●
Schools	●
Small hotels/guest houses	●
Small office buildings	●

● Recommended

○ Applicable.

Motor

CM Booster pumps have built-in current- and temperature-dependent motor protection in accordance with IEC 60034-11 and require no further motor protection.

Features

- Compact
- easy installation
- automatic resetting of alarms
- dry-running protection
- anti cycling (leakage detection)
- maximum continuous operating time.

Operating conditions

System pressure	Max. 10 bar.
Suction lift	Max. 1 m, including suction-pipe pressure loss at a liquid temperature of +20 °C.
Liquid temperature	0-60 °C.
Ambient temperature	Max. +55 °C. Min. -20 °C.
Relative humidity	Max. 95 %.
Enclosure class	IP55.
Insulation class	F.
Sound pressure level	The sound pressure level of the pump is below 55 dB(A).
Supply voltage	1 x 220-240 V, 50 Hz.
Start/stop frequency	Max. 60 per hour.
Cut-in pressure	1.5 - 5 bar (adjustable).

Electrical data

Pump type	Voltage [V]	I _{max} [A]	P ₁ [W]	Plug type
CMB 5-46	1 x 220-240	5.4 - 5.0	1160	Schuko, US, AU, without plug

Approvals

The product is built according to European drinking water approvals.


For further information regarding product approvals, visit Grundfos Product Center.

Wetted parts

The table below specifies the parts of the pump that are in contact with the pumped liquid.

Designation	Material	Technical description
Pump sleeve	Stainless steel	EN 1.4301 AISI 304
Impeller	Stainless steel	EN 1.4301 AISI 304
Diffuser	Technopolymer	PP 20 % Talc
Ejector	Technopolymer	PPE/PS 20 % GF
Nozzle	Stainless steel	EN 1.4301 AISI 304
Shaft	Stainless steel	EN 1.4301 AISI 304
Shaft seal	Carbon with resin/ceramic	CVBP
Filling plug	Technopolymer	PES 30 % GF
Drain plug	Technopolymer	PES 30 % GF


Dimensional drawings

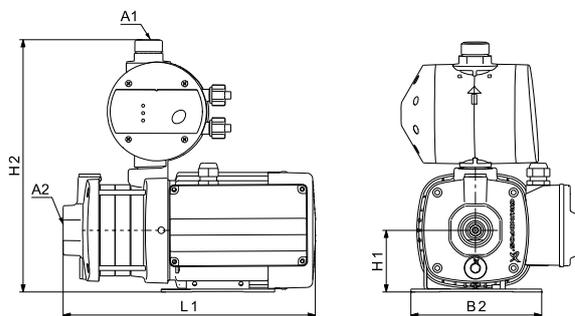

TM049304

Pump type	A1 [inch]	A2 [inch]	L1	B2	H1	H2
Cast Iron						
CMB 5-46	1	1 1/4	381.5	158	75	301

Performance curves

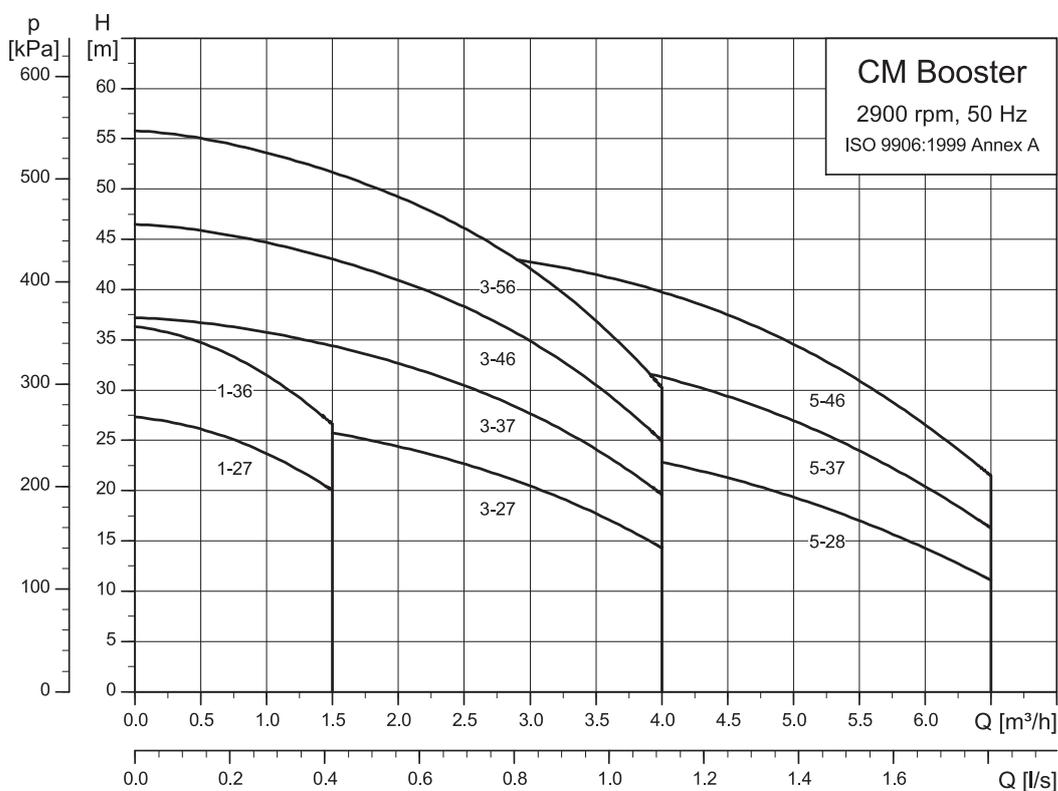

TM061282

*For CMB PM 2, only 5-46 is applicable.

6. CMB-SP PM 1

CM Booster Self-Priming Pressure Manager 1



GR-1015356

CM Booster SP PM 1

The compact self-priming Grundfos CM Booster with a PM 1 pressure manager is suitable for water supply in domestic applications. The pressure manager allows the pump to start and stop automatically according to demand and protects the pump from dry running.

The CM Booster is very easy to install. When the booster has been connected to the pipes, it is all a matter of plugging the plug into a socket, and the system is operational.

Applications

Grundfos self-priming CM PM 1 Booster is mainly used for domestic and light commercial water supply or booster systems.

Application	CMB3	CMB5
Single-family houses	●	○
Two-family houses	●	●
Cluster homes	●	●
Blocks of flats	●	●
Schools	●	●
Small hotels/guest houses	●	●
Small office buildings	●	●

● Recommended

○ Applicable.

Motor

CM Booster pumps have built-in current- and temperature-dependent motor protection in accordance with IEC 60034-11 and require no further motor protection.

Features

- Compact
- self-priming within five minutes
- easy installation
- dry-running protection
- anti cycling (leakage detection).

Versions

CMB-SP is available in two versions.

- Standard version with a pressure manager factory mounted on the pump. This version allows a suction lift for maximum 4 m.
- Kit version, called CMB-SP SET, without a pressure manager mounted on the pump. This version allows a suction lift of 4 to 8 m if there is a pipe between the pump and the pressure manager of at least 0.7 m.

Operating conditions

System pressure	Max. 10 bar.
Suction lift (H2)	0 < H2 ≤ 4 m (standard version). 4 < H2 ≤ 8 m (Set version). Including suction-pipe pressure loss at a liquid temperature of +20 °C.
Liquid temperature	0-60 °C.
Ambient temperature	Max. +55 °C. Min. -20 °C.
Relative humidity	Max. 95 %.
Enclosure class	IP55.
Insulation class	F.
Sound pressure level	The sound pressure level of the pump is below 55 dB(A). Note: During priming the sound level may be higher.
Supply voltage	1 x 220-240 V, 50 Hz.
Start/stop frequency	Max. 60 per hour.
Cut-in pressure	PM 1-15: 1.5 bar. PM 1-22: 2.2 bar.

Electrical data

Pump type	Voltage [V]	I _{max} [A]	P1 [W]	Plug type
CMB-SP 1-36	1 x 220-240	3.1 - 2.8	400	Schuko, AU or without plug
CMB-SP 3-37	1 x 220-240	3.1 - 2.8	587	
CMB-SP 3-47	1 x 220-240	3.1 - 2.8	753	
CMB-SP 5-47	1 x 220-240	5.4 - 5.0	1170	


Approvals

The product is built according to European drinking water approvals.

For further information regarding product approvals, visit Grundfos Product Center.

Self-priming CM Booster sets

Note: The following applies only to self-priming CM Boosters delivered as sets.

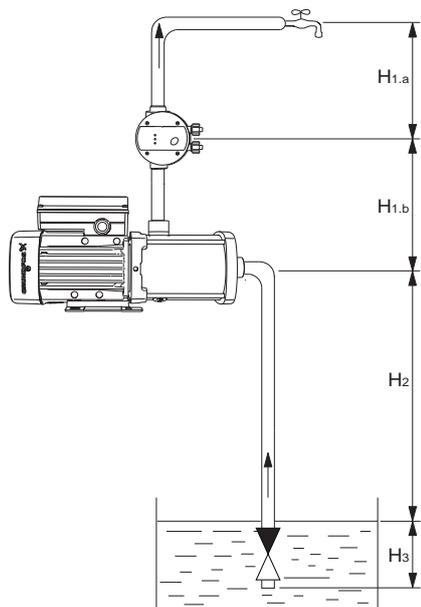

Self-priming CM Booster

The length $H_{1,b}$ of the outlet pipe must be minimum 0.2 metres. See fig. Self-priming CM Booster. By increasing $H_{1,b}$, a suction lift up to 8 metres can be achieved. Use the table below to determine the necessary outlet pipe length for your desired suction lift.

Outlet pipe length $H_{1,b}$ [m]	Resulting suction lift H_2 [m]
≥ 0.35	5
≥ 0.5	6
≥ 0.6	7
≥ 0.7	8

Install the pressure manager on the outlet side of the pump. It incorporates a non-return valve.

We recommend to install the unit so that the height between the unit and the highest tapping point, $H_{1,a}$, does not exceed the values in the table below. See fig. Self-priming CM Booster.


Pressure manager	Start pressure [bar]	Maximum height $H_{1,a}$ [m]
PM 1-15	1.5	10
PM 1-22	2.2	17
PM 2	1.5	11
	2	16
	2.5	21
	3	26
	3.5	31
	4	36
	4.5	41
	5	46

Wetted parts

The table below specifies the parts of the pump that are in contact with the pumped liquid.


Designation	Material	Technical description
Pump sleeve	Stainless steel	EN 1.4301 AISI 304
Impeller	Stainless steel	EN 1.4301 AISI 304
Diffuser	Technopolymer	PP 20 % Talc
Ejector	Technopolymer	PPE/PS 20 % GF
Nozzle	Stainless steel	EN 1.4301 AISI 304
Shaft	Stainless steel	EN 1.4301 AISI 304
Shaft seal	Carbon with resin/ceramic	CVBP
Filling plug	Technopolymer	PES 30 % GF
Drain plug	Technopolymer	PES 30 % GF

Dimensional drawings

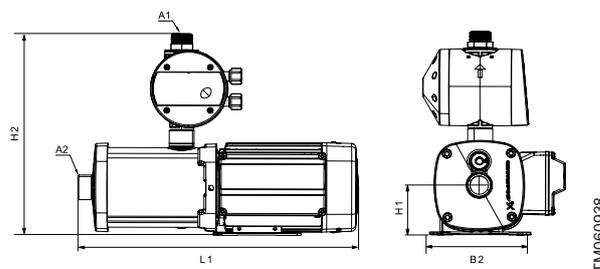

Pump type	A1 [inch]	A2 [inch]	L1	B2	H1	H2
CMB-SP 1-36	1	1	377	158	75	317
CMB-SP 3-37	1	1	377	158	75	317
CMB-SP 3-47	1	1	413	158	75	317
CMB-SP 5-47	1	1	453	158	75	317

Performance curves

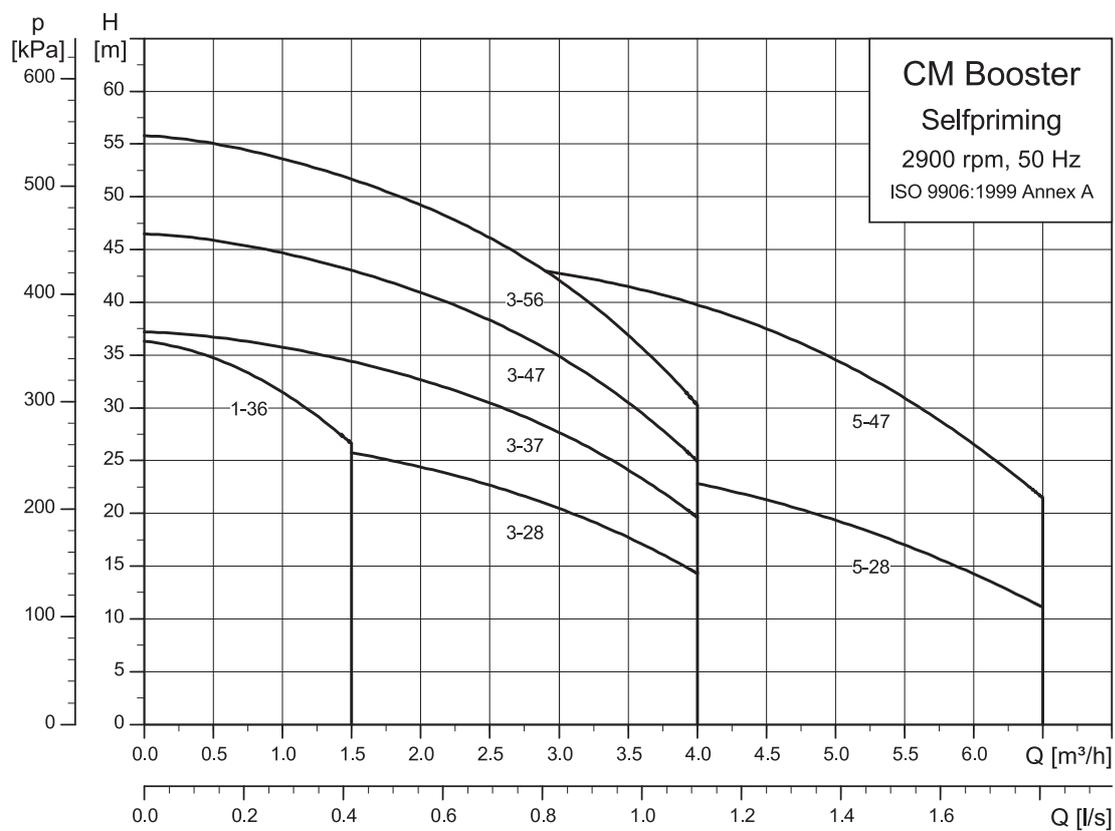

TM061042

7. CMB PM 1

CM Booster Pressure Manager 1



GR-1015967

CM Booster PM 1

The compact Grundfos CM Booster with a PM 1 pressure manager is suitable for water supply in domestic applications. The pressure manager allows the pump to start and stop automatically according to demand and protects the pump from dry running.

The CM Booster is very easy to install. When the booster has been connected to the pipes, it is all a matter of plugging the plug into a socket, and the system is operational.

Applications

Grundfos CM PM 1 Booster is mainly used for domestic and light commercial water supply or booster systems.

Application	CMB1	CMB3	CMB5
Single-family houses	●	●	○
Two-family houses	○	●	●
Cluster homes		●	●
Blocks of flats		●	●
Schools		●	●
Small hotels/guest houses		●	●
Small office buildings		●	●

- Recommended
- Applicable.

Motor

CM pumps have built-in current- and temperature-dependent motor protection in accordance with IEC 60034-11 and require no further motor protection.

Features

- Compact
- easy installation
- dry-running protection
- anti cycling (leakage detection).

Operating conditions

System pressure	Max. 10 bar.
Suction lift	Max. 1 m, including suction-pipe pressure loss at a liquid temperature of +20 °C.
Liquid temperature	0-60 °C.
Ambient temperature	Max. +55 °C. Min. -20 °C.
Relative humidity	Max. 95 %.
Enclosure class	IP44.
Insulation class	F.
Sound pressure level	The sound pressure level of the pump is below 55 dB(A).
Supply voltage	1 x 220-240 V, 50 Hz.
Start/stop frequency	Max. 60 per hour.
Cut-in pressure	PM 1-15: 1.5 bar. PM 1-22: 2.2 bar.

Electrical data

Pump type	Voltage [V]	I _{max} [A]	P1 [W]	Plug type
CMB 1-27	1 x 220-240	1.8 - 2.4	377	
CMB 1-36	1 x 220-240	3.1 - 2.8	436	
CMB 3-27	1 x 220-240	3.1 - 2.8	491	
CMB 3-37	1 x 220-240	3.1 - 2.8	587	Schuko, UK, US, AU, without plug
CMB 3-46	1 x 220-240	3.1 - 2.8	689	
CMB 5-28	1 x 220-240	3.1 - 2.8	715	
CMB 5-37	1 x 220-240	4.4 - 4.0	800	
CMB 5-46	1 x 220-240	5.4 - 5.0	1160	

Approvals

The product is built according to European drinking water approvals.


For further information regarding product approvals, visit Grundfos Product Center.

Wetted parts

The table below specifies the parts of the pump that are in contact with the pumped liquid.

Designation	Material	Technical description
Pump sleeve	Stainless steel	EN 1.4301 AISI 304
Impeller	Stainless steel	EN 1.4301 AISI 304
Diffuser	Technopolymer	PP 20 % Talc
Ejector	Technopolymer	PPE/PS 20 % GF
Nozzle	Stainless steel	EN 1.4301 AISI 304
Shaft	Stainless steel	EN 1.4301 AISI 304
Shaft seal	Carbon with resin/ceramic	CVBP
Filling plug	Technopolymer	PES 30 % GF
Drain plug	Technopolymer	PES 30 % GF


Dimensional drawings

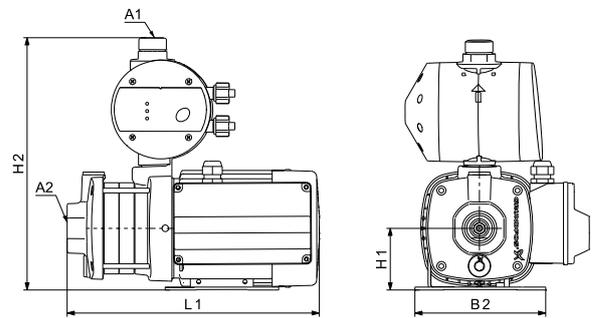

TM049304

Pump	A1 [inch]	A2 [inch]	L1	B2	H1	H2
Cast Iron						
CMB 1-27	1	1	305	158	75	317
CMB 1-36	1	1	323	158	75	317
CMB 3-27	1	1	305.5	158	75	317
CMB 3-37	1	1	323	158	75	317
CMB 3-46	1	1	341.5	158	75	317
CMB 3-56	1	1	417	158	75	317
CMB 5-28	1	1 1/4	305	158	75	317
CMB 5-37	1	1 1/4	363.5	158	75	317
CMB 5-46	1	1 1/4	381.5	158	75	317

Performance curves

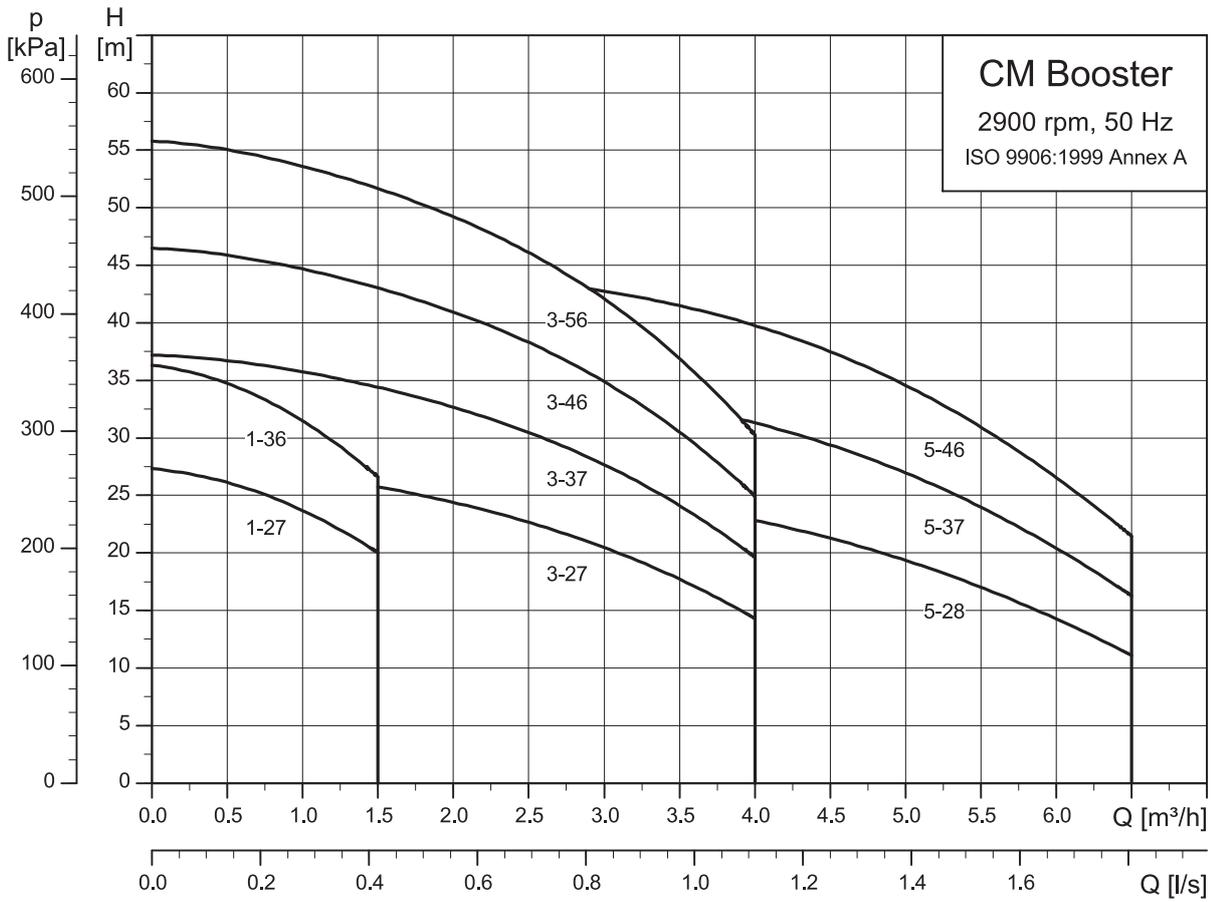

TM061282

8. CMB PT

CM Booster pressure tank



GR-1014606

CM Booster PT

The Grundfos CM Booster PT is an automatic booster system for water supply in domestic and agricultural applications as well as other installations where small leakages are expected to occur.

The booster system consists of a Grundfos CM pump, a pressure tank and a pressure switch assembled into one unit. The tank is delivered with the product and is easily connected to the CM pump.

The system is now ready for use, with preset start pressure and compliant tank precharge pressure. The pressure band is approximately 1 bar.

When the system has been connected to the pipes, it is all a matter of inserting the plug into a power supply socket, and the system is operational.

Applications

The Grundfos CM PT Booster is mainly used for agricultural and light commercial water supply and similar water installations where minor leakages can be expected.

Application	CMB 3	CMB 5
Agriculture	●	●
Irrigation	●	●
Single-family houses	○	○
Two-family houses	○	○
Cluster homes	○	○
Blocks of flats	○	○
Schools	○	○
Small hotels or guest houses	○	○
Small office buildings	○	○

- Recommended
- Applicable.

Motor

Single-phase CM pumps incorporate current- and temperature-dependent motor protection according to IEC 60034-11 and require no external motor protection.

Three-phase CM pumps do not incorporate motor protection. The CM pumps require external motor protection.

Features

- CM pump
- pressure tank to minimise the number of pump starts
- motor protection (single-phase only)
- automatic operation.

Operating conditions

System pressure	Max. 10 bar.
Suction lift	Max. 1 m, including suction-pipe pressure loss at a liquid temperature of +20 °C.
Liquid temperature	0-60 °C.
Ambient temperature	Max. +50 °C. Min. -20 °C.
Relative humidity	Max. 95 %.
Enclosure class	IP44.
Insulation class	F.
Sound pressure level	The sound pressure level of the pump is below 55 dB(A).
Supply voltage	1 x 220-240 V, 50 Hz. 3 x 220-240 / 380-415 V, 50 Hz.
Start/stop frequency	Max. 60 per hour.
Cut-in pressure	1.5 bar.

Electrical data

Vertical tank, 1 x 220-240 V, 50 Hz

Pump type	Voltage [V]	I _{max} [A]	P1 [W]	Plug type
CMB 3-37	1 x 220-240	3.1 - 2.8	587	Schuko/UK
CMB 3-46	1 x 220-240	3.1 - 2.8	690	Schuko/UK
CMB 5-37	1 x 220-240	4.4 - 4.0	925	Schuko/UK
CMB 5-46	1 x 220-240	5.4 - 5.0	1160	Schuko/UK

All pumps are fitted with a 1.5 m cable.

Approvals

The product is built according to European drinking water approvals.


For further information regarding product approvals, visit Grundfos Product Center.

Wetted parts

The table below specifies the parts of the pump that are in contact with the pumped liquid.

Designation	Material	Technical description
Pump sleeve	Stainless steel	EN 1.4301 AISI 304
Impeller	Stainless steel	EN 1.4301 AISI 304
Diffuser	Technopolymer	PP 20 % Talc
Ejector	Technopolymer	PPE/PS 20 % GF
Nozzle	Stainless steel	EN 1.4301 AISI 304
Shaft	Stainless steel	EN 1.4301 AISI 304
Shaft seal	Carbon with resin/ceramic	CVBP
Filling plug	Technopolymer	PES 30 % GF
Drain plug	Technopolymer	PES 30 % GF

Dimensional drawings

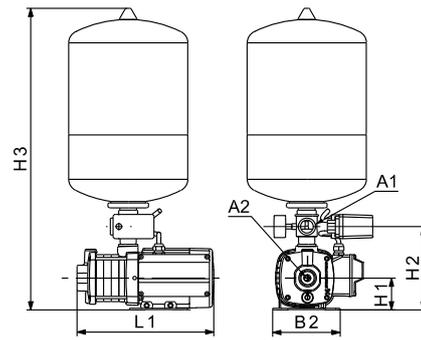


TM054150

CMB	Tank [l]	H3	H1	H2	A1 [inch]	A2 [inch]	L1	B2
CMB 3-37	18	585	75	195	1	1	323.5	158
CMB 3-47	18	585	75	195	1	1	341.5	158
CMB 5-37	18	585	75	195	1	1 1/4	363.5	158
CMB 5-47	18	585	75	195	1	1 1/4	381.5	158

Performance curves

Vertical tank

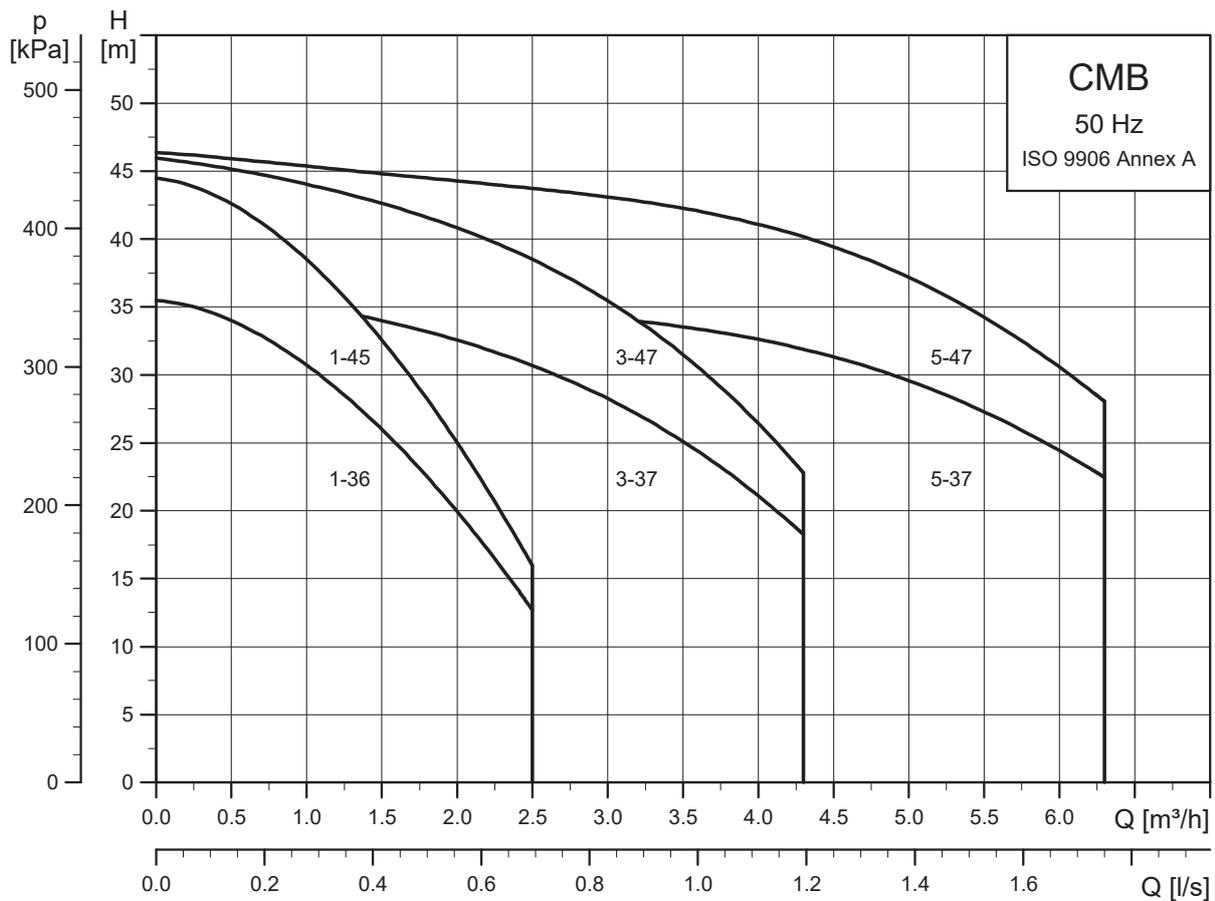

TM054260

Pressure losses in fittings and hose are not included.

9. CMB PS

CM Booster with pressure switch



GR-1014594

CM Booster PS

The Grundfos CM PS Booster PS is an automatic booster for water supply in domestic and agricultural applications as well as other installations where small leakages are expected to occur.

The booster system consists of a Grundfos CM pump, a 5-way valve and a pressure switch. A pressure tank must be fitted to complete the booster system. Use your own pressure tank or order one of the Grundfos GT tanks that make a perfect fit for your booster system.

The pressure band is approximately 1 bar.

When the system has been connected to the pipes, it is all a matter of inserting the plug into a power supply socket, and the system is operational.

Applications

The Grundfos CM PS Booster is mainly used for agricultural and light commercial water supply and similar water installations where minor leakages can be expected.

Motor

Application	CMB 1	CMB 3	CMB 5	CMB 10
Agriculture	●	●	●	●
Irrigation	●	●	●	●
Single-family houses	○	○	○	○
Two-family houses	○	○	○	○
Cluster homes	○	○	○	○
Blocks of flats	○	○	○	○
Schools	○	○	○	○
Small hotels or guest houses	○	○	○	○
Small office buildings	○	○	○	○

- Recommended
- Applicable.

Single-phase motors

Single-phase CM pumps incorporate current- and temperature-dependent motor protection according to IEC 60034-11 and require no external motor protection.

Three-phase motors

Three-phase CM pumps do not incorporate motor protection and therefore require external motor protection.

Features

- CM pump
- pressure tank to minimise the number of pump starts
- motor protection (single-phase only)
- automatic operation.

Operating conditions

System pressure	Max. 10 bar.
Suction lift	Max. 1 m, including suction-pipe pressure loss at a liquid temperature of +20 °C.
Liquid temperature	0-60 °C.
Ambient temperature	Max. +55 °C. Min. -20 °C.
Relative humidity	Max. 95 %.
Enclosure class	IP44.
Insulation class	F.
Sound pressure level	The sound pressure level of the pump is below 62 dB(A).
Supply voltage	1 x 220-240 V, 50 Hz. 3 x 220-240 / 380-415 V, 50 Hz.
Start/stop frequency	Max. 60 per hour.
Cut-in pressure	1.5 bar.

Electrical data

1 x 220-240 V, 50 Hz

Pump type	Voltage [V]	I _{max} [A]	P1 [W]	Plug type
CMB PS 1-36	1 x 220-240	3.1 - 2.8	436	AU
CMB PS 3-37	1 x 220-240	3.1 - 2.8	587	AU
CMB PS 5-47	1 x 220-240	5.4 - 5.0	1410	AU
CMB PS 5-56	1 x 220-240	8.72 - 8.1	1410	AU
CMB PS 5-75	1 x 220-240	8.72 - 8.1	1790	AU
CMB PS 5-93	1 x 220-240	12.2 - 11.0	2130	AU
CMB PS 10-47	1 x 220-240	12.2 - 11.0	2070	AU

All pumps are fitted a with 1.5 m cable.

Approvals

The product is built according to European drinking water approvals.


For further information regarding product approvals, visit Grundfos Product Center.

Wetted parts

The table below specifies the parts of the pump that are in contact with the pumped liquid.

Designation	Material	Technical description
Pump sleeve	Stainless steel	EN 1.4301 AISI 304
Impeller	Stainless steel	EN 1.4301 AISI 304
Diffuser	Technopolymer	PP 20 % Talc
Ejector	Technopolymer	PPE/PS 20 % GF
Nozzle	Stainless steel	EN 1.4301 AISI 304
Shaft	Stainless steel	EN 1.4301 AISI 304
Shaft seal	Carbon with resin/ceramic	CVBP
Filling plug	Technopolymer	PES 30 % GF
Drain plug	Technopolymer	PES 30 % GF


Dimensional drawings

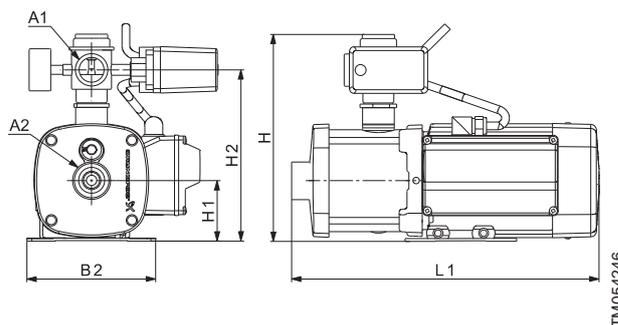

1 x 220-240 V, 50 Hz

Pump type	H	H1	H2	A1 [inch]	A2 [inch]	L1	B2
CMB PS 1-36	255	75	208	1	1	323	158
CMB PS 3-37	255	75	208	1	1	323	158
CMB PS 5-47	255	75	208	1	1 1/4	381	158
CMB PS 5-56	270	90	223	1	1 1/4	469	178
CMB PS 5-75	270	90	223	1	1 1/4	505	178
CMB PS 5-93	270	90	223	1	1 1/4	539	178
CMB PS 10-47	323	100	261	1	1 1/2	451	199

Performance range

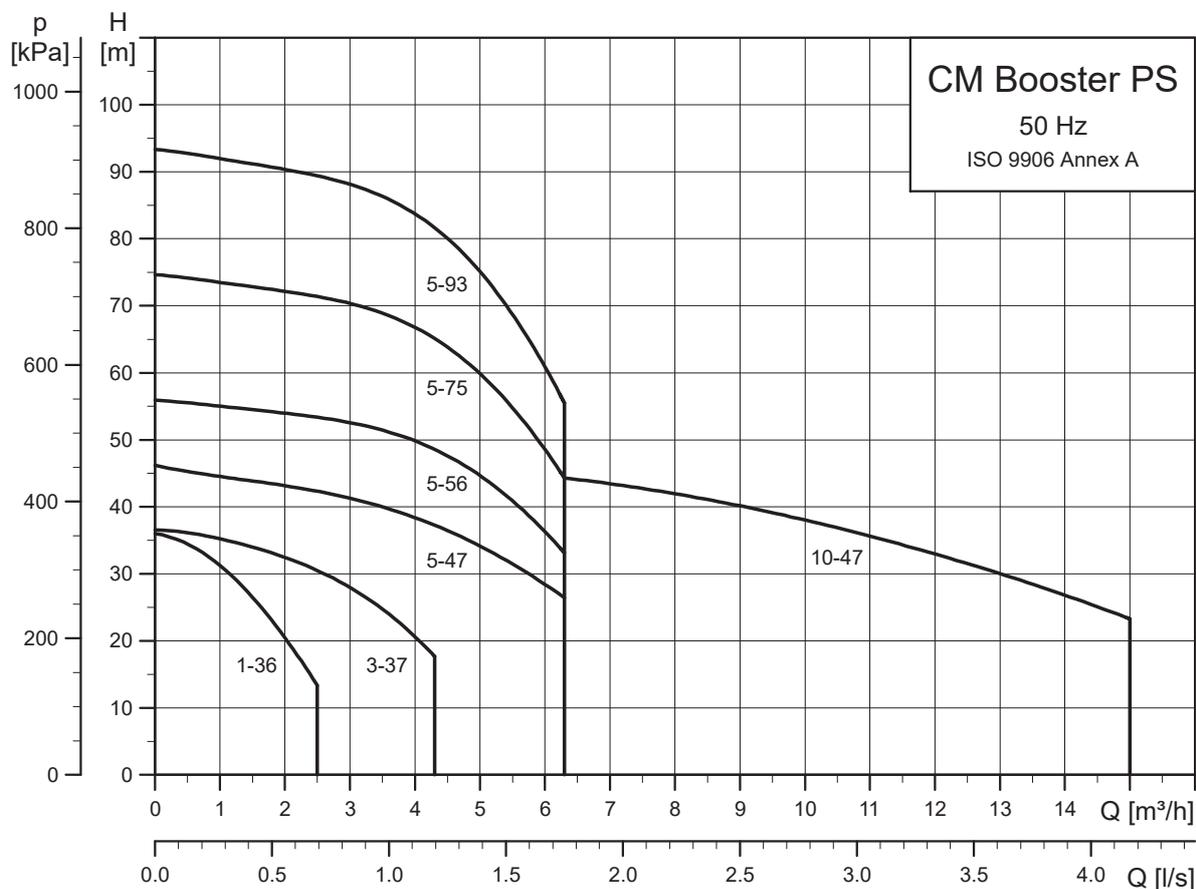

Pressure losses in fittings and hose are not included.

10. Product numbers

CMBE TWIN

D: Integrated frequency converter.

Pump type	Controller	Stainless steel	Thread type	Plug	Product number
<i>CMBE 3, 1 x 200-240 V, 50/60 Hz</i>					
CMBE 3-62	D	•	Rp	Schuko	99219420
CMBE 3-62	D	•	Rp	Fuse Box	99220844
CMBE 3-62	D	•	Rp	AU	99282854
CMBE 3-62	D	•	Rp	UK	99963950
CMBE 3-62	D	•	Rp	Type O	99968524
CMBE 3-62	D	•	Rp	None	99521893
CMBE 3-93	D	•	Rp	Schuko	99219421
CMBE 3-93	D	•	Rp	Fuse Box	99220845
CMBE 3-93	D	•	Rp	AU	99282855
<i>CMBE 5, 1 x 200-240 V, 50/60 Hz</i>					
CMBE 5-62	D	•	Rp	Schuko	99219423
CMBE 5-62	D	•	Rp	Fuse Box	99220847
CMBE 5-62	D	•	Rp	AU	99282856
CMBE 5-62	D	•	Rp	UK	99963966
CMBE 5-62	D	•	Rp	Type O	99968525

CMBE TWIN Accessories

Accessory type	Ball valve	Unions	1" inlet connection	1 1/2" outlet connection	1 1/4" inlet connection	Product Number
Vibration damper kit						99217259
Twin manifold set	•	•	•	•		99229422
Twin manifold set	•	•		•	•	99229453

CMBE

D: Integrated frequency converter.

Pump type	Controller	Stainless steel	Thread type	Plug	Product number
<i>CMBE 1, 1 x 200-240 V, 50/60 Hz</i>					
CMBE 1-44	D	•	Rp	Schuko	98374697
CMBE 1-44	D	•	Rp	None	98374679
CMBE 1-44	D	•	NPT	None	98548109
CMBE 1-44	D	•	Rp	AU	98374705
CMBE 1-44	D	•	Rp	UK	98374713
CMBE 1-44	G	•	Rp	Schuko	98563698
CMBE 1-44	D	•	NPT	US	98810910
CMBE 1-44	D	•	NPT	US	99561340
CMBE 1-75	D	•	NPT	None	98548110
CMBE 1-75	D	•	NPT	US	98810921
<i>CMBE 3, 1 x 110 V, 60 Hz</i>					
CMBE 3-51	D	•	Rp	None	99871395
<i>CMBE 3, 1 x 115 V, 60 Hz</i>					
CMBE 3-51	D	•	NPT	US	98810924
<i>CMBE 3, 1 x 200-240 V, 50/60 Hz</i>					
CMBE 3-30	D	•	Rp	US	98374724
CMBE 3-30	D	•	NPT	None	98548112
CMBE 3-51	D	•	Rp	None	99877061
CMBE 3-62	D	•	Rp	Schuko	98374701
CMBE 3-62	D	•	Rp	None	98374693
CMBE 3-62	D	•	NPT	None	98548113
CMBE 3-62	D	•	Rp	AU	98374709
CMBE 3-62	D	•	Rp	UK	98374717
CMBE 3-62	D	•	Rp	UK	99953869
CMBE 3-62	G	•	Rp	Schuko	98563709
CMBE 3-62	D	•	Rp	Type O	99968508
CMBE 3-93	D	•	Rp	Schuko	98374702
CMBE 3-93	D	•	Rp	None	98374694
CMBE 3-93	D	•	NPT	None	98548114
CMBE 3-93	G	•	Rp	Schuko	98563722
<i>CMBE 3, 3 x 220 V, 60 Hz</i>					
CMBE 3-51	D	•	Rp	None	99877073
<i>CMBE 5, 1 x 200-240 V, 50/60 Hz</i>					
CMBE 5-62	D	•	Rp	Schuko	98374704
CMBE 5-62	D	•	Rp	None	98374696
CMBE 5-62	D	•	NPT	None	98548116
CMBE 5-62	D	•	Rp	AU	98374712
CMBE 5-62	D	•	Rp	UK	98374720
CMBE 5-62	D	•	Rp	UK	99953871
CMBE 5-62	G	•	Rp	Schuko	98563727
CMBE 5-62	D	•	Rp	Type O	99968512
CMBE 5-62	D	•	Rp	IRAM	98987736
<i>CMBE 10, 1 x 200-240 V, 50/60 Hz</i>					
CMBE 10-54	D	•	Rp	Schuko	98382202
CMBE 10-54	D	•	Rp	None	98382190
CMBE 10-54	D	•	NPT	None	98548118
CMBE 10-54	D	•	Rp	None	98661978
CMBE 10-54	D	•	NPT	None	99503806

Pump type	Controller	Stainless steel	Thread type	Plug	Product number
CMBE 10-54	D	•	Rp	UK	98382206
CMBE 10-54	D	•	Rp	UK	99953872
CMBE 10-54	G	•	Rp	Schuko	98563731
CMBE 10-54	D	•	Rp	IRAM	98987737

CMB PM 1

Pump type	Controller	Stainless steel	Cast iron	Self-priming	Thread type	Plug	Product number
<i>CMB 1 PM 1, 1 x 220 V, 50 Hz</i>							
CMB 1-27	PM 1-15		•		Rp	None	98661927
CMB 1-36	PM 1-15		•		Rp	Schuko	97530096
CMB 1-36	PM 1-15		•		Rp	AU	97530097
CMB-SP 1-36	PM 1-15	•		•	Rp	AU	98507562
<i>CMB 3 PM 1, 220 V, 50 Hz</i>							
CMB 3-27	PM 1-15		•		Rp	Schuko	97530123
CMB 3-27	PM 1-15		•		Rp	None	98661934
CMB 3-37	PM 1-15		•		Rp	Schuko	97530132
CMB 3-37	PM 1-15		•		Rp	Schuko	98780335
CMB 3-37	PM 1-15		•		Rp	None	97530135
CMB 3-37	PM 1-15		•		Rp	None	98661936
CMB 3-37	PM 1-15		•		Rp	None	98661937
CMB 3-37	PM 1-15		•		Rp	UK	99953864
CMB 3-37	PM 1-15		•		Rp	AU	97530133
CMB-SP 3-37	PM 1-15	•		•	Rp	Schuko	98507565
CMB 3-46	PM 1-22		•		Rp	Schuko	98780336
CMB 3-46	PM 1-22		•		Rp	None	97530144
CMB 3-46	PM 1-22		•		Rp	None	98661938
CMB 3-46	PM 1-22		•		Rp	None	98661939
CMB 3-46	PM 1-22		•		Rp	UK	99953865
CMB-SP 3-47	PM 1-22	•		•	Rp	None	98507575
<i>CMB 5 PM 1, 220 V, 50 Hz</i>							
CMB 5-28	PM 1-22		•		Rp	Schuko	97530159
CMB 5-37	PM 1-22		•		Rp	Schuko	98780343
CMB 5-37	PM 1-22		•		Rp	UK	99953866
CMB 5-37	PM 1-22		•		Rp	AU	97687685
CMB 5-46	PM 1-22		•		Rp	Schuko	98780348
CMB 5-46	PM 1-22		•		Rp	None	97530171
CMB 5-46	PM 1-22		•		Rp	UK	99953868
CMB 5-46	PM 1-22		•		Rp	AU	97530169
CMB-SP 5-47	PM 1-22	•		•	Rp	Schuko	98507581

CMB PM 2

Pump type	Controller	Stainless steel	Cast iron	Self-priming	Thread type	Plug	Product number
<i>CMB 3 PM 2, 220 V, 50 Hz</i>							
CMB-SP 3-28	PM 2	•		•	Rp	AU	98507627
CMB-SP 3-37	PM 2	•		•	Rp	AU	98507628
CMB-SP 3-47	PM 2	•		•	Rp	AU	98507629
CMB-SP 3-56	PM 2	•		•	Rp	AU	98507630
<i>CMB 5 PM 2, 220 V, 50 Hz</i>							
CMB-SP 5-28	PM 2	•		•	Rp	AU	98507635
CMB 5-46	PM 2		•		Rp	Schuko	97530082
CMB-SP 5-47	PM 2	•		•	Rp	AU	98507636

CMB PT and CMB PS

Pump type	Stainless steel	Cast iron	Pressure switch	Tank size [l]	Thread type	Plug	Product number
<i>CMB 1 PT and CMB 1 PS</i>							
CMB PS 1-36	•		•		Rp	AU	98244555
<i>CMB 3 PT and CMB 3 PS</i>							
CMB PT 3-37		•	•	18, vertical	Rp	Schuko	98158257
CMB PT 3-37	•		•	18, vertical	Rp	UK	99953844
CMB PS 3-37	•		•		Rp	AU	98244556
CMB PT 3-46		•	•	18, vertical	Rp	Schuko	98158258
CMB PT 3-46	•		•	18, vertical	Rp	UK	99953850
<i>CMB 5 PT and CMB 5 PS</i>							
CMB PT 5-37		•	•	18, vertical	Rp	Schuko	98158260
CMB PT 5-37	•		•	18, vertical	Rp	UK	99953852
CMB PT 5-46		•	•	24, vertical	Rp	Schuko	98158281
CMB PT 5-46	•		•	18, vertical	Rp	UK	99953863
CMB PS 5-47	•		•		Rp	AU	98117630
CMB PS 5-56	•		•		Rp	AU	98117632
CMB PS 5-75	•		•		Rp	AU	98117633
CMB PS 5-93	•		•		Rp	AU	98117634
CMB PS 10-47	•		•		Rp	AU	98117635

11. Accessories

The vital components from the booster solutions are also available as stand-alone products. They can be combined with any pump to create a booster system.

Inlet/outlet pipe kits for CMBE TWIN


Inlet and outlet pipe kits are available for the CMBE TWIN booster. All pipe kits include ball valve and unions and 1 1/2" outlet connection. The inlet connection is available in two sizes.

Type	Product Numbers
1" inlet connection	PN 99229422
1 1/4" inlet connection	PN 99229453

Vibration damper kit for CMBE TWIN

The vibration dampers are mounted on the base plate of the CMBE TWIN booster. We also recommend to support the pipes with a vibration damper.

Type	Product Numbers
Vibration dampers	PN 99217259

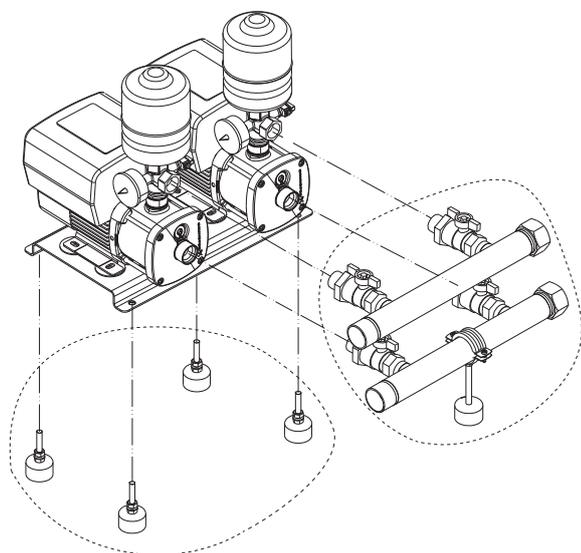

Vibration damper kit (left) and inlet/outlet pipe kit (right) for the CMBE TWIN booster

TM068740

12. Grundfos Product Center

Online search and sizing tool to help you make the right choice.

From the international view, you can select your specific country to view the product range available to you.


International view: <http://product-selection.grundfos.com>

All the information you need in one place

Performance curves, technical specifications, pictures, dimensional drawings, motor curves, wiring diagrams, spare parts, service kits, 3D drawings, documents, system parts. The Product Center displays any recent and saved items - including complete projects - right on the main page.

Downloads

On the product pages, you can download installation and operating instructions, data booklets, service instructions, etc., in PDF format.

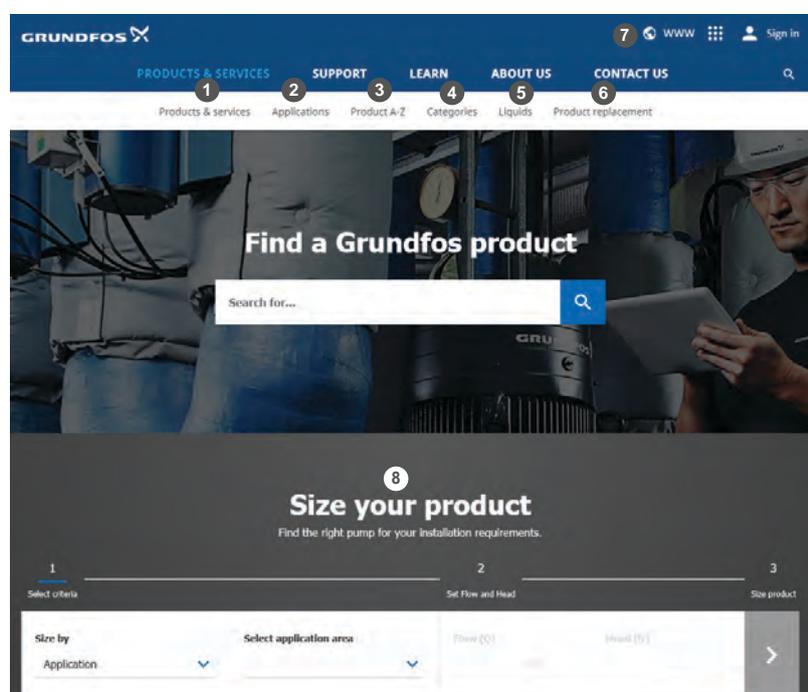

TM072383-1

When you select your country, you will see the menus below. Note that some menus may not be available depending on the country.

Example: <https://product-selection.grundfos.com/uk>

Pos.	Description
1	Products & services enables you to find products and documents by typing a product number or name into the search field.
2	Applications enables you to choose an application to see how Grundfos can help you design and optimise your system.
3	Products A-Z enables you to look through a list of all the Grundfos products.
4	Categories enables you to look for a product category.
5	Liquids enables you to find pumps designed for aggressive, flammable or other special liquids.
6	Product replacement enables you to find a suitable replacement.
7	WWW enables you to select the country, which changes the language, the available product range and the structure of the website.
8	Sizing enables you to size a product based on your application and operating conditions.

